


**City of Wichita, Kansas
Americans with Disabilities Act Transition Plan**

**Whitney Village Park
(Phyllis Hall Memorial Park)**

4270 East Whitney Lane

July 2005

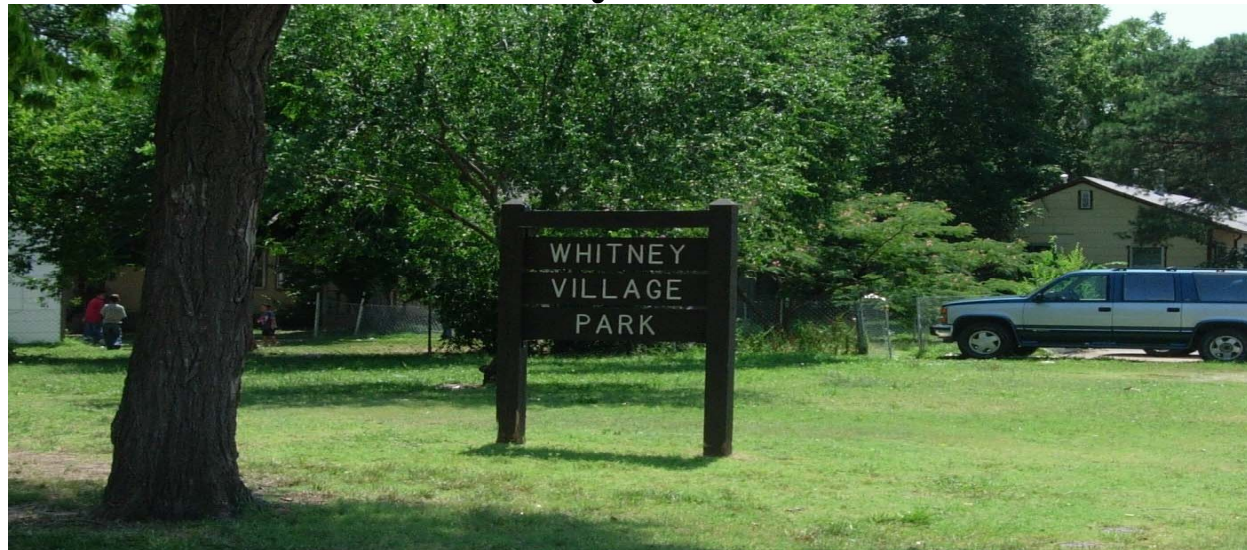

Prepared by

DMCG
Disability Management Consulting Group L.L.C.
2801 Jonquil Place
Columbia, MO 65202

In conjunction with

The Great Plains ADA & IT Center and the City of Wichita Disability Advisory Board

City of Wichita – ADA/504 Transition Plan – Whitney Village Park - July 2005

Legend: **Blue** font identifies hyperlinked documents – **Red** font indicates recommended changes to structures or policies

Locations		Structural Inconsistencies		Recommended Corrections/Modifications to Ensure Program Access			Criteria – L=low, M=medium, H=high			Supplemental Technical Information			Finalized Actions		
Location	Identified Issue	ADAAG Specifications	Recommended Correction	Priority (overall)	Public Access	Frequency - PWD	Photo #	Conceptual Costs	Support Information	Finalized Correction	Date to be Corrected	Date Completed (Include initial)			
1. Parking	Accessible parking does not exist.	4.1.2(5)(a) , (b) , 4.6	If parking spaces are provided for self-parking by employees or visitors, or both, then accessible spaces complying with 4.6 shall be provided in each such parking area in conformance with the table shown in (5)(a) . In addition, one in every eight accessible spaces, but not less than one, shall be served by an access aisle 96 in (2440 mm) wide minimum and shall be designated "van accessible." Provide an appropriate number of accessible parking spaces that comply with ADAAG specifications. Note: Ensure that accessible spaces are located so that individuals with disabilities have a fully accessible path of travel to pedestrian sidewalks, entrances or other pedestrian pathways.	H	H	M	1	\$200	(See Accessible Parking Detail – Attachment A and Parking Technical Bulletin , for greater clarification).	Stripe the parking lot and provide 1 No. Universal accessible parking space close to exiting traffic at the parking lot.	12/31/09				
2. Pedestrian Paths	An accessible path of travel does not exist leading to the sandbox or basketball court.	4.3.2 4.1.2	According to ADAAG, At least one accessible route complying with 4.3 shall be provided within the boundary of the site from public transportation stops, accessible parking spaces, passenger loading zones if provided, and public streets or sidewalks, to an accessible building entrance. At least one accessible route complying with 4.3 shall connect accessible buildings, accessible facilities, accessible elements, and accessible spaces that are on the same site. Due to dirt/grass surfaces an accessible path of travel does not exist leading to the previous mentioned features. An accessible route must be stable, firm and slip-resistant (rubber, concrete or asphalt). Ensure that an accessible path of travel exists leading to all facilities and at least one of each type of ground level play area.	H	H	M	2 3	\$1,000	ADAAG	Provide an accessible sidewalk to the spectator areas of the sandbox and basketball court as well as accessible wheelchair seating areas at these spectator areas.	12/31/09				

Whitney Village Park - Conceptual Cost Projections

Total	\$1,200
Year Three (High)	\$1,200
Year Five (Medium)	\$0
Year Ten (Low)	\$0